

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/024298 A1

(51) International Patent Classification⁷: **B01D 53/18,**
53/14

(21) International Application Number:
PCT/FI2002/000701

(22) International Filing Date: 30 August 2002 (30.08.2002)

(25) Filing Language: Finnish

(26) Publication Language: English

(71) Applicant (for all designated States except US):
KALMARIN TILA [FI/FI]; Vaajakoskentie 104,
FIN-41310 Leppävesi (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KALMARI, Erkki**
[FI/FI]; Vaajakoskentie 104, FIN-41310 Leppävesi (FI).


Published:

— with international search report

(74) Agent: **BERGGREN OY AB**; P.O. Box 16, FIN-00101
Helsinki (FI).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD FOR PRESSURISING BIOGAS IN A GAS WASHER

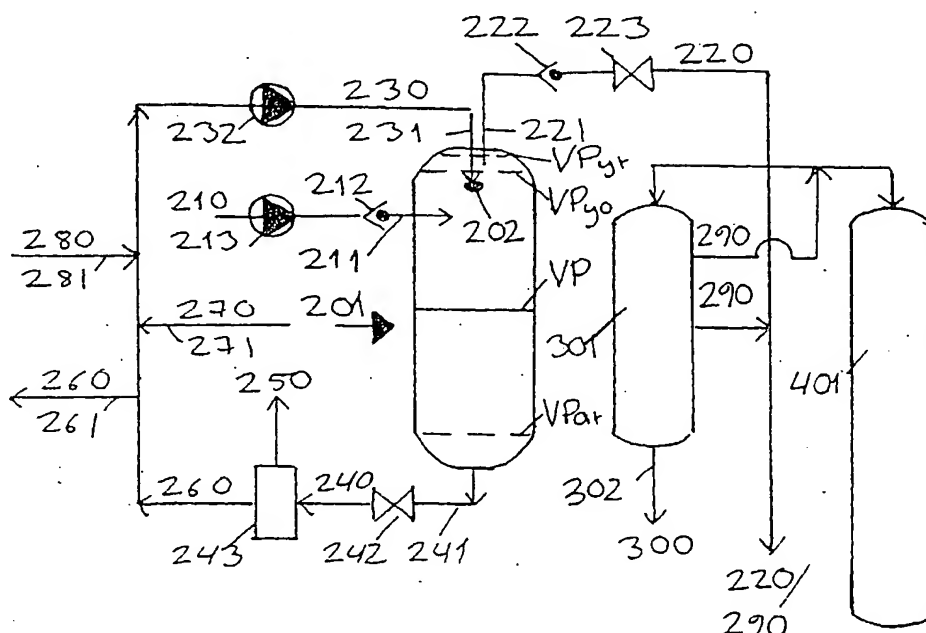

(57) Abstract: The invention relates to a pressurization apparatus (201) for biogas. Said pressurization apparatus (201) comprises a biogas inlet pipe (211) having at least a cut-off means (222, 223), a washing water inlet pipe (231) having at least a washing water pressurization device (232), a washing water outlet pipe (241) having at least a cut-off valve (242), said apparatus being controlled either manually or automatically.

Apparatus and method for pressurising biogas in a gas washer

Background of the Invention

The invention relates to a pressurization apparatus for biogas.

- 5 Biogas may be produced for instance from agricultural and communal waste waters and sludges by means of separate biogas reactors. It may also be recovered e.g. from landfills where decomposing organic wastes are disposed of.

10 In general, biogas comprises from 30 to 50 % by volume of carbon dioxide, and accordingly, even a partial removal thereof significantly reduces for instance the space needed for storing the gas. Also the effectivity of biogas combustion is improved by lowering the carbon dioxide content thereof. Moreover, biogas commonly contains other compounds such as hydrogen sulphide complicating the use thereof, or causing e.g. corrosion.

- 15 One obstacle in the use of biogas is generally its low production or recovery pressure. It may be used on site for instance in boilers and aggregates, whereas its use in vehicles is often uneconomical due to high pressurization and storage costs.

20 Biogas is pressurized e.g. by means of high pressure compressors, such as water ring compressors. It is also possible to pressurize and purify biogas for instance with column washers that increase the pressure of biogas to about 10 to 40 at (gauge). Drawbacks of these apparatuses include the fact that they are either physically large or technically extremely complicated. Accordingly, such apparatuses are very expensive particularly in cases where pressures of 100 to 200 at (gauge) are sought.

General Description of the Invention

- 25 Now a pressurization apparatus for biogas has been found, said apparatus being technically particularly simple and compact.

To achieve this object, the invention is characterized by facts presented in the independent claims. The other claims disclose some preferable embodiments of the invention.

- 30 Biogas may not only be pressurized but also purified by means of the pressurization apparatus of the invention using for instance water as the washing liquid. If necessary, compounds or agents that intensify the purification may be added to said water.

The pressurization apparatus of the invention comprises at least a biogas inlet pipe provided with a pressurization device, a biogas outlet pipe, an inlet pipe for washing water provided with a pressurization device, as well as an outlet pipe for washing water. The pressurization apparatus is further equipped with cut-off valves and one-way valves
5 necessary for the operation thereof. The operation of the pressurization apparatus is controlled for instance with a limit switch or a balance.

Preferably, a unit for removing carbon dioxide may be connected to said washing water outlet pipe.

The biogas inlet pipe may preferably be provided with a one-way valve preventing
10 biogas from flowing out of the pressurization apparatus. This one-way valve is preferably placed as close to the pressurization apparatus as possible. Said one-way valve controls the biogas flow. If the pressure of the pressurization apparatus is lower than that of the inlet pipe, biogas will flow to the pressurization apparatus, whereas the biogas flow is stopped in situations where the pressure of the pressurization apparatus is
15 higher than that of the inlet pipe.

The removal of biogas from the pressurization apparatus may for instance be carried out by providing the outlet pipe with a cut-off device such as a cut-off valve and/or one-way valve for biogas. The operation thereof is adjusted to and/or controlled according to the washing water and feed.

20 Pressurized washing water is preferably passed through a nebulizer into the pressurization apparatus containing biogas. As the water level rises, biogas washed in the pressurization apparatus starts to flow out of the pressurization apparatus under control of the cut-off device. As the water level reaches the upper limit in the container or outlet pipe, the washing water feed is stopped and the valve of the washing water outlet pipe
25 is opened. As the water level is lowered, biogas is either fed or it flows through the one-way valve to the pressurization apparatus under control of the set values of said one-way valve. The valve of the washing water outlet pipe is closed as the water level reaches the set lower limit. The biogas feed to the pressurization apparatus is stopped, or biogas may flow to the pressurization apparatus under control of an optional one-
30 way valve to reach the desired control value. Then the above cycle is repeated.

The nebulizer is preferably placed in the upper part of the pressurization apparatus to always pass the biogas to be purified through the spray of the nebulizer, thus assuring that only purified biogas is leaving the pressurization apparatus.

Biogas may preferably flow to the pressurization apparatus during the lowering of the water level. It may also flow to the pressurization apparatus after the lowering and/or rising of the water level has stopped, or as the water level is rising.

5 Washing water is preferably passed from the outlet pipe thereof to the pressurization device of the inlet pipe and to the nebulizer of the washing water. Washing water may be replaced partially or totally with fresh washing water. The washing water pipes may for instance be provided with a device for dispensing a detergent. In addition, the outlet pipe for washing water is preferably equipped with a unit for removing carbon dioxide.

10 The pressurized and purified biogas leaving the pressurization apparatus may be passed through one or several drying device(s) e.g. to pressurized tanks or biogas containers.

The apparatus used to purify and pressurize biogas is technically very simple, and moreover, the use thereof is economical and safe. It is preferable to feed biogas at a pressure of 1 to 100 at, such as 1 to 50 at, 1 to 10 at, 5 to 15 at, 5 to 50 at or 50 to 100 at (gauge) to the pressurization apparatus where it is pressurized to a pressure of 10 to 15 600 at, such as 10 to 50 at, 50 to 100 at, 100 to 300 at, 100 to 200 at, or 200 to 600 at (gauge).

20 The pressurization apparatus of the invention may only have two pumps. Both of them may preferably be serially produced gas compressors and water compressors that are already currently used in the industry or agriculture. This significantly contributes to the feasibility of the invention.

25 In the pressurization apparatus of the invention, preferably two water compressors may be used to feed said washing water. Relative to said washing water, one of the pumps may then be a powerful low pressure pump, the other pump being less powerful high pressure pump. Then, more than half of the pressure container may be quickly filled by means of the low pressure pump, and thereafter the rest of the container is filled against higher counterpressure with the higher pressure pump. This solution makes the use of the apparatus substantially quicker and more effective compared to an apparatus with a single water pump.

30 The maintenance of the apparatus of the invention is also favourable. The maintenance and repair costs of serially produced devices are usually low.

It is thus possible to pressurize biogas preferably to a pressure of 100 to 600 at (gauge) by means of an apparatus that is technically very simple, and simultaneously remove therefrom carbon dioxide, particles and hydrogen sulphide. Since the solubility of e.g.

carbon dioxide depends on the pressure of the washing water used, high carbon dioxide removal is attained with the apparatus of the invention due to high pressures used.

It is also preferable to use unpurified pressurized biogas in the pressurization apparatus to displace washing water, since this prevents the carbon dioxide of the washing water from being released in the pressurization apparatus. Carbon dioxide may be removed from washing water in the carbon dioxide removal unit connected to the outlet pipe where the pressure of the washing water is lowered to a value near the ambient pressure, that is to 0.5 to 1.5 at (gauge). Carbon dioxide is thus released quickly and effectively from the washing water. Preferably, carbon dioxide depleted washing water may again be recycled to the pressurization device of washing water.

The pressurization apparatus may be designed in different sizes. It may be built as small units for farms, or as large units for instance for waste water treatment plants. Also embodiments that may be transferred are possible, allowing for the pressurization of biogas from agricultural gas supplies, if necessary.

The apparatus of the invention may be controlled either with an automatic and/or manually operated control means to carry out the cycle necessary for the pressurization.

Detailed Description of the Invention

Some embodiments of the invention are now discussed in detail with reference to the appended drawings.

Figure 1 shows a pressurization apparatus used to pressurize biogas.

In Figure 1, a pressurization apparatus 201 used to purify biogas 210 comprises a biogas inlet pipe 211, a biogas outlet pipe 221, washing water inlet pipe 231 and washing water outlet pipe 241. The biogas inlet pipe 211 is provided with a one-way valve 212 and a biogas feeding means 213. The biogas outlet pipe 221 is provided with a one-way valve 222 and a cut-off valve 223 acting as the cut-off means of biogas, as well as a drying means 300 for biogas. The washing water inlet pipe 231 is connected to a water compressor 232 and a nebulized 202 placed inside the pressurization apparatus 201. The washing water outlet pipe 241 is equipped with a cut-off valve 242 and a carbon dioxide removal unit 243.

With the apparatus of Figure 1, biogas for instance from a biogas reactor and a biogas reservoir may be pressurized and purified according to the following cycle:

- pressurized washing water 230 is fed through the nebulizer 202 of the inlet pipe 231 to the pressurization apparatus 201 containing biogas 210
- the water level VP in the pressurization apparatus 201 having reached the upper control limit VP_{YO} , the cut-off valve 223 of the biogas outlet pipe 221 is opened
5 thus causing purified biogas 220 to flow into the biogas outlet pipe 220
- the water level VP in the pressurization apparatus 201 having reached the upper limit VP_{YR} , the cut-off valve 242 of the washing water outlet pipe 241 is opened
- as the pressure is lowered, pressurized biogas 210 flows through the biogas inlet pipe 211
- 10 - the water level VP in the pressurization apparatus 201 having reached the lower limit VP_{AR} , the cut-off valve 242 of the washing water outlet pipe 241 is closed.

As the pressure in the pressurization apparatus 201 rises, the flow of biogas 210 from the biogas inlet pipe 211 stops. The one-way valve 212 of the biogas inlet pipe 211 controls the flow of biogas 210 during the cycle.

- 15 As the water level VP in the pressurization apparatus 201 has reached the upper limit VP_{YR} , the feed of said washing water may be stopped and the cut-off valve 233 of the biogas outlet pipe 211 is closed, and then the cut-off valve 242 of the washing water outlet pipe 241 is opened. Also, as the water level VP in the pressurization apparatus 201 has reached the upper limit VP_{YR} , it is also possible to continue with the feed of
20 washing water 230, closing the cut-off valve 223 of the biogas outlet pipe 221, and thereafter opening the the cut-off valve 242 of the washing water outlet pipe 241. This procedure is possible for instance in situations where the outlet pipe 241 and the corresponding cut-off valve 242 are sufficiently large to remove the washing water 230 accumulated in the pressurization apparatus.
- 25 Washing water 240 from the outlet pipe 241 is removed and passed to the carbon dioxide removal unit 243 where carbon dioxide 250 contained in the washing water is released as the pressure is lowered. Then the purified, or fresh washing water 260 is passed to the pressurization compressor 231. On the other hand, the purified washing water 260 may be added with fresh washing water 270 through a pipe 271 and a deter-
30 gent 280 through a pipe 281. The recycled washing water may also be replaced totally with fresh washing water 270.

Claims

1. A pressurization apparatus for biogas, **characterized** in that said pressurization apparatus (201) for pressurizing biogas (210) comprises:

- a biogas inlet pipe (211) having at least a biogas feeding means (213),
- 5 - a biogas outlet pipe (221) having at least a biogas cut-off means (222, 223),
- a washing water inlet pipe (231) having at least a washing water pressurization device (232),
- a washing water outlet pipe (241) having at least a cut-off valve (242),

and is operated according to the following cycle:

- 10 - pressurized washing water (230) is fed to the pressurization apparatus (201) containing biogas (210) using said washing water pressurization device (232) of said washing water inlet pipe (231),
- purified biogas (220) is passed through said cut-off means (222, 223) of said biogas outlet pipe (221),
- 15 - the water level (VP) in the pressurization apparatus (201) having reached the upper limit (VP_{YR}), the cut-off valve (242) of said washing water outlet pipe (241) is opened,
- pressurized biogas (210) is passed to said pressurization apparatus (201) through said biogas inlet pipe (211),
- 20 - the water level (VP) in the pressurization apparatus (201) having reached the lower limit (VP_{AR}), the cut-off valve (242) of said washing water outlet pipe (241) is closed.

2. Pressurization apparatus according to claim 1, **characterized** in that said biogas inlet pipe (221) comprises a one-way valve (212) to control the flow of said biogas
25 (210).

3. Pressurization apparatus according to claim 1 or 2, **characterized** in that biogas (210) is fed with said biogas feeding means (213) at a pressure of 1 to 100 at (gauge).

4. Pressurization apparatus according to any of the preceding claims, **characterized** in that washing water (230) is fed with said washing water pressurization device (232) at a pressure of 10 to 600 at (gauge).
5. Pressurization apparatus according to any of the preceding claims, **characterized** in that a carbon dioxide removal unit (243) is connected to said pressurization apparatus (201).
6. Pressurization apparatus according to any of the preceding claims, **characterized** in that said pressurization apparatus (201) comprises one or more nebulizers (202) for washing water.
- 10 7. Pressurization apparatus according to any of the preceding claims, **characterized** in that said pressurization apparatus (201) comprises two or more washing water pressurization devices (232).
8. Pressurization apparatus according to any of the preceding claims, **characterized** in that one or more dryers (301) for pressurized biogas (220) is (are) connected to said
15 pressurization apparatus (201).
9. Pressurization apparatus according to any of the preceding claims, **characterized** in that the biogas inlet pipe (211) comprises a one-way valve (212).
10. Pressurization apparatus according to any of the preceding claims, **characterized** in that one or more pressure tanks (401) for storage of said pressurized biogas (220) is
20 (are) connected to said pressurization apparatus (201).
11. A method for pressurizing biogas, **characterized** in that biogas (210) is pressurized by means of a pressurization apparatus (201) comprising:
 - a biogas inlet pipe (211) having at least a biogas feeding means (213),
 - a biogas outlet pipe (221) having at least a cut-off means (222, 223),
 - 25 - a washing water inlet pipe (231) having at least a washing water pressurization device (232),
 - a washing water outlet pipe (241) having at least a cut-off valve (242),said apparatus being operated according to the following cycle:
 - pressurized washing water (230) is fed to the pressurization apparatus (201) containing biogas (210) using said washing water pressurization device (232),
30

- at least as the water level (VP) is lowered, purified biogas (220) is passed through said cut-off means (222, 223) of said biogas outlet pipe (221),
 - the water level (VP) in the pressurization apparatus (201) having reached the upper limit (VP_{YR}), the cut-off valve (242) of said washing water outlet pipe (241) is opened,
 - pressurized biogas (210) is passed to said pressurization apparatus (201) through said biogas inlet pipe (211),
 - the water level (VP) in the pressurization apparatus (201) having reached the lower limit (VP_{AR}), the cut-off valve (242) of said washing water outlet pipe (241) is closed.
12. Method according to claim 11, **characterized** in that the feed of washing water is stopped as the water level (VP) has reached the upper limit (VP_{YR}),
13. Method according to claims 11–12, **characterized** in that washing water (230) is fed with said washing water pressurization device (232) at a pressure of 10 to 600 at (gauge).
14. Method for constructing a pressurization apparatus for biogas, **characterized** in that a pressurization apparatus (201) is provided with:
- a biogas inlet pipe (211) having at least a biogas feeding means (213),
 - a biogas outlet pipe (221) having at least a biogas cut-off means (222, 223),
 - a washing water inlet pipe (231) having at least a washing water pressurization device (232),
 - a washing water outlet pipe (241) having at least a cut-off valve (242),
 - manually operated and/or automatic control device to control said pressurization apparatus according to the methods of claims 11–13.



FIG. 1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 02/00701

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B01D 53/18, B01D 53/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0180670 A1 (CRYOTEC ENERGY SYSTEMS CO., LTD.), 14 May 1986 (14.05.86) --	1-14
A	GB 2207872 A (GREEN LAND RECLAMATION LIMITED), 15 February 1989 (15.02.89) --	1-14
A	US 4409102 A (MILTON R. TANNER), 11 October 1983 (11.10.83) --	1-14
A	FR 2534248 A1 (L'AIR LIQUIDE, SOCIETE ANONYME POUR L'ETUDE ET L'EXPLOITATION DES PROCEDES GEORGES CLAUDE), 13 April 1984 (13.04.84) --	1-14

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 March 2003

Date of mailing of the international search report

31-03-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Bertil Dahl/EÖ

Telephone No. +46 8 782 25 00

International application No.
PCT/FI 02/00701

International application No.
PCT/FR 02/00701

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 3109120 A1 (STEFFEN, HEINZ), 23 Sept 1982 (23.09.82) -- -----	1-14

INTERNATIONAL SEARCH REPORT
Information on patent family members

30/12/02

International application No.

PCT/FI 02/00701

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
EP	0180670	A1	14/05/86	NONE	
GB	2207872	A	15/02/89	GB 8719128 D	00/00/00
US	4409102	A	11/10/83	NONE	
FR	2534248	A1	13/04/84	BE 897917 A	05/04/84
DE	3109120	A1	23/09/82	NONE	

1/1

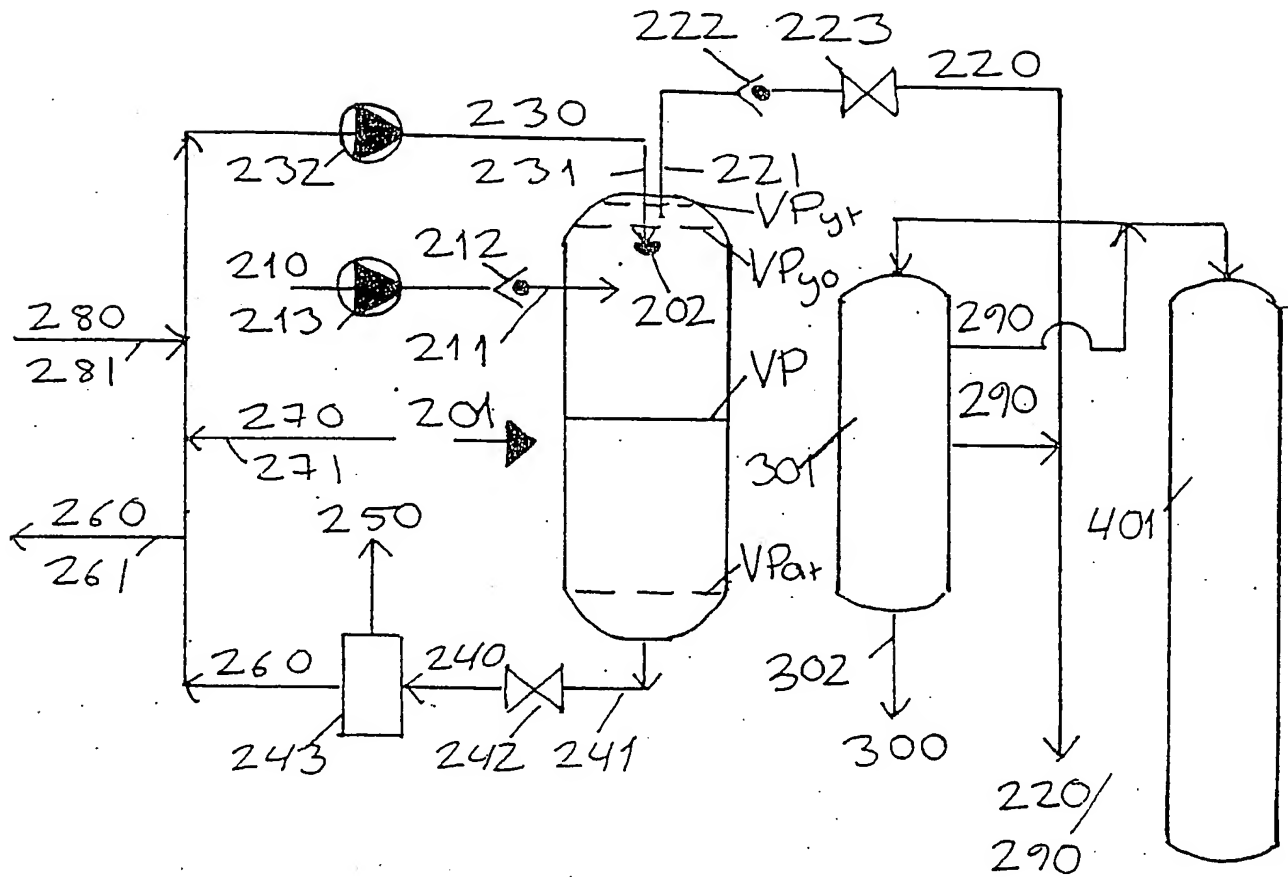


FIG. 1